




## **O<sub>2</sub>** *Specification*

Frame	Factor	O2	Toray®, Nippon Graphite Pan-Based Fiber
Fork	Factor	O2 VAM	Svelte / Svelte Disc
Seat Post			27.2 mm
Headset	FSA	IS Series	FSA IS Series Integrated
Head Tube Diameter			1-1/8 upper and 1-3/8 lower
Bottom Bracket			BBright 79 mm
Front Axle			12 x 100 mm thru-axle
Rear Axle			12 x 142 mm thru-axle
Brake Type			Flat Mount Disc (140/160) or Direct Mount Rim
Cable Routing			Internal
Compatible Components			Electronic and Mechanical
Color			Miami Blue or Pearl White
Manufacturer Warranty			5 year limited lifetime warranty
Wheel Size			700c
Max Tire Clearance			30 mm

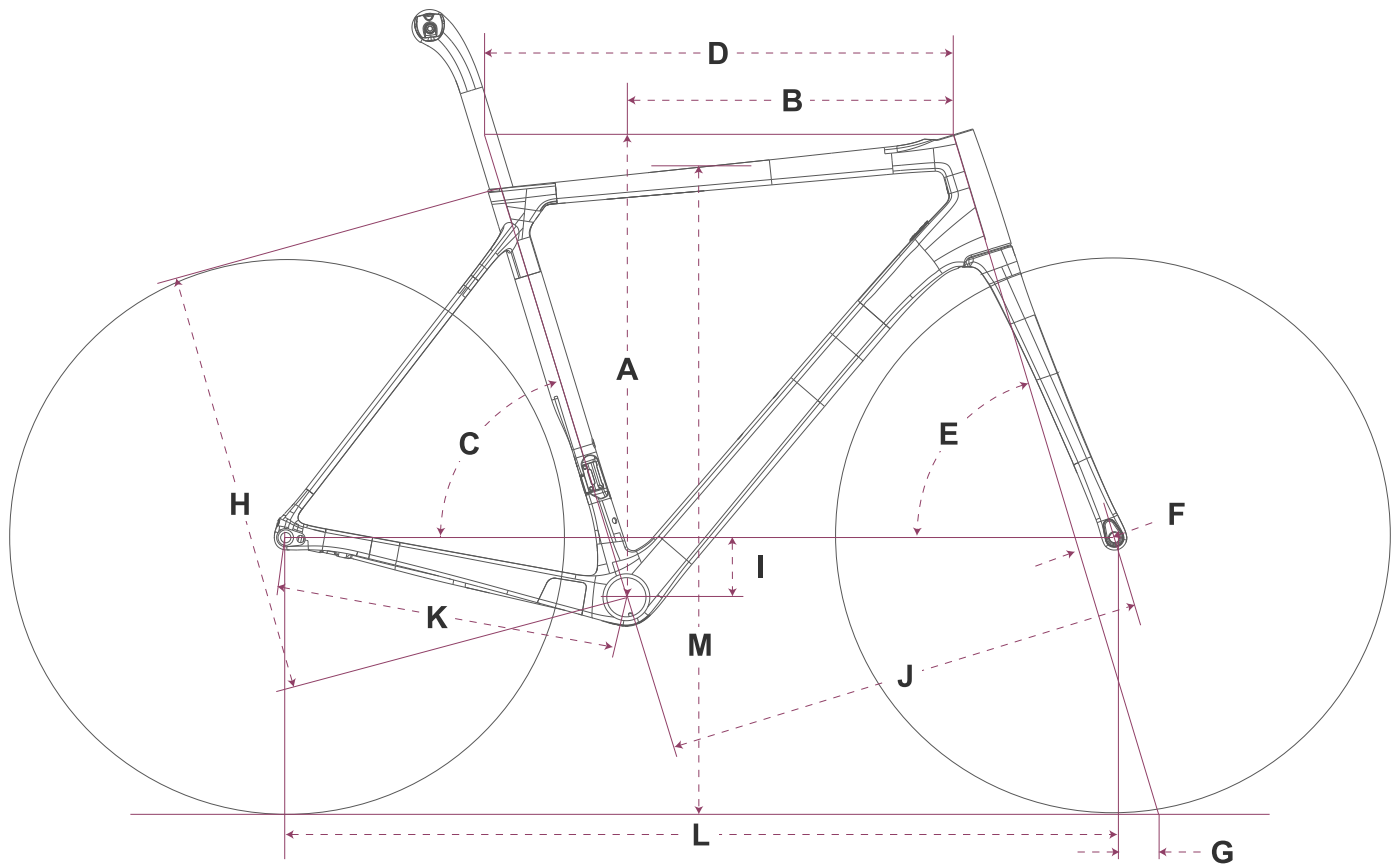

## O<sub>2</sub>

Size	49	52	54	56	58
<b>A</b> Stack	503	523	542	565	587
<b>B</b> Reach	370	376	384	392	401
<b>C</b> Seat Tube Angle	74	73	73	73	73
<b>D</b> Top Tube	515	534	550	565	580
<b>E</b> Head Tube Angle	71.3	71.6	73.1	73.3	73.3
<b>F</b> Fork Offset	53	53	43	43	43
<b>G</b> Fork Trail	60	58	59	58	58
<b>H</b> Seat Tube Length	455	480	503	526	548
<b>I</b> BB Drop	75	70	70	70	70
<b>J</b> Front Center	576	587	577	590	605
<b>K</b> Chainstay length	406	406	406	406	410
<b>L</b> Wheelbase	970	982	972	985	1005
<b>M</b> Stand over height	727	750	772	794	820

\*All dimensions in mm