

GALLIUM CS

NEW  
MODEL



BECAUSE EVEN THE PROS STARTED SOMEWHERE. AND BECAUSE EVERYONE WHO DREAMS OF RACING, DESERVES GALLIUM PERFORMANCE. THIS ENTRY-LEVEL GALLIUM IS THE PERFECT WAY TO GET INTO THE GAME. THE PERFECT WAY TO MAKE YOUR MARK ON THOSE LONG INTENSE TRAINING RUNS, OR TO JOCKEY FOR RANK ON GROUP RIDES.

PERFORMANCE

**PERFORMANCE FOR ALL**  
All new for 2019, our most accessible race bike ever; an entry-level Gallium for everyone to enjoy.

The Gallium CS offers way more than just a taste of what a race bike feels like. It is the brainchild of our years spent designing world class race bikes. As such, the Gallium CS provides a level of performance that makes it truly deserving of its name.




RED MATTE



TEAL BLUE MATTE

HIGHLIGHTS

- EXCEPTIONAL POSITIONING VERSATILITY**  
*For tackling the tallest mountains or simply enjoying superior downhill stability and handling*
- UCI APPROVED PERFORMANCE MONOCOQUE CARBON FRAME**  
*A new economical lay-up on a World Tour proven platform*
- MONOCOQUE CARBON FORK**  
*Stiff and comfortable*
- SIZE-SPECIFIC GEOMETRY**  
*Well balanced ergonomic fit for every frame in every size*
- OPTIMAL BALANCE**  
*A winning combination of power, lightness and rigidity for riders of all shapes and sizes*
- PRESS-FIT 3D SYSTEM**  
*Extends positioning flexibility by offering 3 head tube heights for every frame size without sacrificing any rigidity; system preserves 5% and 11% more incremental frontal rigidity vs. standard spacers when the handlebar is set at 15mm and 25mm respectively*

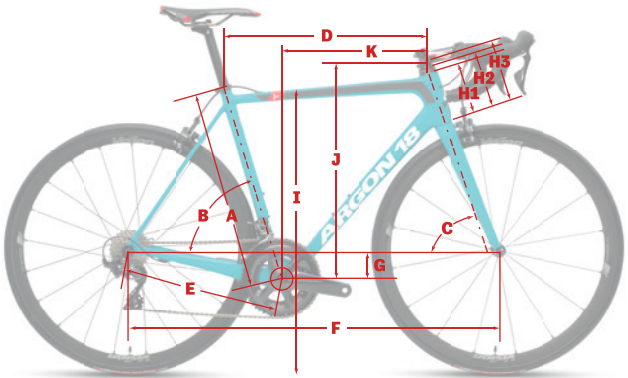

GEOMETRY

SIZE CLASSIC		XXS 44-46	XS 47-50	S 51-53	M 54-56	L 57-59	XL 60-62	
A	Seat Tube Height	cm	41.8	45.3	49.2	53.0	56.5	59.5
B	Seat Tube Angle	deg	75.5	74.5	74.0	73.5	73.0	72.5
C	Head Tube Angle	deg	71.0	72.0	72.7	72.7	72.7	73.0
D	Top Tube Length*	cm	50.0	51.9	53.8	55.6	57.5	59.5
E	Chainstay Length	cm	40.6	40.6	40.6	40.8	41.0	41.0
F	Wheelbase	cm	96.0	96.2	97.1	98.7	100.3	101.5
G	BB Drop	cm	7.5	7.5	7.5	7.5	7.5	7.5
H1	HeadTube Length	cm	7.6	8.1	10.8	14.0	16.3	18.8
H2	(+ 15mm 3D)	cm	9.1	9.6	12.3	15.5	17.8	20.3
H3	(+ 25mm 3D)	cm	10.1	10.6	13.3	16.5	18.8	21.3
I	Standover Height†	cm	66.1	69.0	72.6	76.1	79.1	81.8

\* Horizontal Top Tube Length      † Measured with 700x23c tires

FIT (STACK AND REACH)

J	Stack	cm	48.1	48.9	51.7	54.7	56.9	59.4
K	Reach	cm	37.5	38.3	38.9	39.4	40.1	40.8
J	(15mm 3D)	cm	49.5	50.3	53.1	56.1	58.3	60.8
K	(15mm 3D)	cm	37.0	37.8	38.5	39.0	39.7	40.4
J	(25mm 3D)	cm	50.5	51.3	54.1	57.1	59.3	61.8
K	(25mm 3D)	cm	36.7	37.5	38.2	38.7	39.4	40.1
Saddle Height Min.†	cm	62.3	65.8	69.7	73.5	77.0	80.0	
Saddle Height Max.†	cm	73.8	77.3	81.2	85.0	88.5	91.5	

† Measured From Middle of BB to Top of Saddle Along Seat tube

FRAMESET CHARACTERISTICS

AERO	-	+
COMFORT	-	+
STIFFNESS / RESPONSIVENESS	-	+
LIGHTNESS	-	+

Frame Weight: 1006g\*      Max Tire Size: 25mm      BB Standard: BB86  
Fork Weight: 417g      Max Rim Size: N/A  
\* Medium size frame, painted with no small parts

Actual product specs may vary from those shown in this catalog.

